



(11) Publication number : **0 684 704 A2**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number : **95302820.6**

(51) Int. Cl.⁶ : **H04B 1/38, H04B 7/02**

(22) Date of filing : **26.04.95**

(30) Priority : **06.05.94 US 239110**

(43) Date of publication of application :
29.11.95 Bulletin 95/48

(84) Designated Contracting States :
CH DE FR IT LI

(71) Applicant : **AT & T Corp.**
32 Avenue of the Americas
New York, NY 10013-2412 (US)

(72) Inventor : **Blonder, Greg E.**
112 Mountain Avenue
Summit, New Jersey 07901 (US)
Inventor : **Knoedl, Goerge, Jr.**
191 Little York Mt.,
Pleasant Road
Milford, New Jersey 08848 (US)
Inventor : **Johnson, Bertrand Harold**
60 Possum Way
Murray Hill, New Jersey 07974 (US)
Inventor : **Saleh, Adel Abdel Moneim**
112 Crawfords Corner Rd.
Holmdel, New Jersey 07733 (US)

(74) Representative : **Johnston, Kenneth Graham**
AT&T (UK) Ltd.
5 Mornington Road
Woodford Green Essex, IG8 OTU (GB)

(54) **A diversity antenna for a wrist telephone.**

(57) A radiotelephone wrist device includes a case having a transceiver and a strap attached to the case for fastening the device to a user's wrist. The strap has a top layer and a bottom layer. The top layer is attached to the bottom layer by a pivot mechanism which facilitates rotating at least a portion of the top layer with respect to the bottom layer. A microphone is located on the strap and electrically connected to the transceiver. A speaker is located at an end of the top layer of the strap and electrically connected to the transceiver. A first antenna is located in the bottom layer of the strap. A second antenna is located in the rotatable portion of the top layer of the strap.

EP 0 684 704 A2

BEST AVAILABLE COPY

Field of the Invention

This invention relates to a portable radiotelephone device in the form of a wrist device.

Background of the Invention

Recent progress in microelectronics has greatly miniaturized radio communication devices such as receivers, transmitters and antennas. This miniaturization has permitted the integration of these components into wrist-carried radio devices.

Such a portable wrist radiotelephone device is disclosed in U.S. Patent No. 5,239,521 issued August 24, 1993 to Blonder. The disclosed wrist radiotelephone device comprises a case having a display, and a strap having a top layer and a bottom layer. The top layer includes a releasable end which allows the top layer to separate from the bottom layer in the area where one end of the strap is attached to the case. The top layer of the strap remains attached to the bottom layer via a hinge which also permits the top layer to rotate. Embedded within the strap are a microphone and a speaker which are connected via conductors to a transceiver located in the case. The speaker is located at the releasable end of the top layer of the strap, and the microphone is located at the attached end of the top layer of the strap.

In operation, the released top layer is rotated in such a way that the speaker is located in the palm of the user's hand and the microphone is located along the inside of the user's forearm. The user's arm is raised so that the user's hand is cupped over the user's ear. Sound ports are located on a front side of the speaker facing the user's ear. The user's hand is oriented such that the user's palm containing the speaker is proximate to the user's ear and the microphone is proximate to the user's mouth. This arrangement allows for the device to be used as a telephone.

Summary of the Invention

The present invention is directed to an advantageous improvement of such device. In accordance with the present invention, a first antenna is embedded in the bottom layer of the strap and a second antenna is embedded in the top layer of the strap. The strap is such that when the device is to be operated, the first antenna can be made substantially perpendicular to the second antenna. Such a perpendicular arrangement of the antennas provides polarization diversity that renders the arrangement essentially insensitive to orientation, thereby providing better transmission and reception.

In an illustrative embodiment, a radiotelephone wrist device comprises a case having a transceiver and a strap attached to the case for fastening the device to a user's wrist. The strap is comprised of a top

layer and a bottom layer. The top layer is attached to the bottom layer by a pivot mechanism which facilitates rotating at least a portion of the top layer with respect to the bottom layer. A microphone is preferably located on the strap or on the member and electrically connected to the transceiver. A speaker is located at an end of the top layer of the strap and electrically connected to the transceiver. A first antenna is located in the bottom layer of the strap. A second antenna is located in the rotatable portion of the top layer of the strap.

Brief Description of the Drawing

FIG. 1 is a front perspective view of a wrist telephone device in accordance with the invention.

FIG. 2 is a side perspective view of the wrist telephone device of FIG. 1.

FIG. 3 is a perspective view of the wrist telephone device with the top layer of the strap in the released and open position.

FIG. 4 is a simplified drawing of the wrist telephone device of FIG. 1 as it is worn on a user's wrist.

FIG. 5 is a perspective, partially cutaway view of the wrist telephone which depicts an on hook/off hook mechanism and a speaker housing.

FIG. 6 is a schematic diagram illustrating the electrical functionality of the on hook/off hook mechanism of FIG. 5.

FIG. 7 is a perspective view of the wrist telephone device showing an antenna, exhibiting diversity, embedded within the strap of the device.

FIGS. 8 and 9 are schematic diagrams of the antenna structure of FIG. 7.

FIG. 10 is a schematic diagram of an alternate embodiment of the antenna structure of FIGS. 8 and 9.

FIG. 11 is a side perspective view of the wrist telephone of FIG. 1 with the top layer of the strap in the released position.

Detailed Description

Referring to the drawings, FIG. 1 and 2 show a wrist radiotelephone 2. The telephone 2 is comprised of two main parts, a telephone case 4, and a multilayer strap or band 10. The strap 10 is attached to the case 4 and holds the case 4 onto the wrist of the user. The case 4 contains a miniaturized transceiver (not shown) designed to provide two-way mobile telephone communications, a means for initiating a telephone call with a keypad or voice recognition device (not shown), a display 7 and a power supply such as a battery (not shown). Timekeeping, alarm or pager circuitry can also be incorporated into the case 4.

The case 4 is attached to the band by any number of ways. The two most preferable ways are mounting the case 4 onto the strap 10 or fastening the strap 10

to the upper and lower sides 6 and 8 of the case 4. A clasping means 17, illustratively a sleeve integrally connected to the underside of the case 4, receives the strap 10 and enables the size of the strap 10 to be adjusted so that the device 2 fits over a user's hand and can be fastened to a user's wrist. A safety strap (not shown) can also be attached to the case 4 and strap 10 to help prevent loss of the device 2. The strap 10 has at least two layers, a top layer 12 which is the outer layer and a bottom layer 14 which is in contact with a user's wrist.

FIG. 11 shows a cradle 16 contained in the bottom layer 14 of the strap 10 and proximate to the case 4. The cradle 16 receives a first end 13 of the top layer 12 of the strap 10. The top layer 12 is detachable from the bottom layer 14 in the area of the strap 10 that is in close proximity to the upper side 6 or lower side 8 of the case 4 by removing the first end 13 of the top layer 12 from the cradle 16. The top layer 12 remains attached to the bottom layer 14 via a pivotable hinge 18 which is illustratively located opposite the case 4. When the top layer 12 is released, the pivotable hinge 18 permits the top layer 12 to rotate approximately $\pm 90^\circ$ for left or right hand use. Rotation of the top layer 12 is typically towards the user's hand so that the released top layer 12 is perpendicular to bottom layer 14 and located in the palm of the user's hand, as shown in FIG. 4.

As shown in FIGs. 1-5, 7 and 11, the speaker 20 is located on the first end 13 of the top layer 12. The speaker housing 21 includes sound ports 34a on a front side 30 of the housing 21 and, in accordance with the invention, at least one sound port 34b located on an edge surface 32 of the housing 21. The microphone 22 is located either on the top surface of the bottom layer 14 in close proximity to the hinge 18 or on the top layer 12 incorporated into the hinge 18. Rotation of the top layer 12 places the speaker 20 in the palm of the user's hand and leaves the microphone positioned along the inside of the user's forearm. The speaker 20 and microphone 22 are connected to the transceiver via separate pairs of conductors 73 indicated in FIG. 7 embedded in the strap 10.

When the top layer 12 is released and rotated, the device 2 is in the open position which causes the device 2 to be "off hook", for placing or receiving a call. In preferred embodiments of the invention, as illustrated in FIGs. 5 and 6, a sensing means, such as a magnetic reed switch 36, can be placed in the case 4 directly beneath the speaker cradle 16. The magnetic reed switch 36 includes contacts 40 which are responsive to a mechanism, such as a magnet, associated with the speaker housing 21. The magnet can be separate from the speaker 20, or if the speaker 20 has magnetic qualities, such as a moving coil speaker, the speaker acts as the magnet. In the embodiment of FIG. 5, the speaker includes a moving coil and a magnet 38. The magnetic reed switch 36 is capable of

sensing the proximity of the magnet 38. When the speaker is proximate to the reed switch 36, leakage flux from the speaker creates a magnetic field which forces the reed switch contacts 40 apart, thereby causing the device to be on hook. When the speaker 20 is removed from the cradle 16, the contacts 40 close, thereby causing the device to automatically be off hook. Other types of sensors can be used to control the on hook/off hook condition such as, but not limited to, an optical switch, a capacitive sensor, a Hall effect sensor or a mechanical sensor.

However, use of a magnetic sensing means is particularly advantageous since the magnetic switch 36 has low resistive properties. The magnetic switch is a passive device which does not require any power from the transceiver and does not generate interference to the reception of radio frequency signals. In addition, the hermetic arrangement of the magnetic switch within the cradle reduces the risk of contamination or corrosion.

When a user wishes to place a call, the speaker 20 is released and rotated and placed in the palm of the user's hand. The user then places the palm of his or her hand over his or her ear to use the device 2. Placing the speaker 20 in the palm of the user's hand and the microphone 22 along the inside of the user's forearm and proximate to the user's mouth creates a private environment in which the user can have a conversation. Furthermore, the existence of the edge surface sound ports 34b advantageously allows the user to hear the calling party speaking even if the front sound ports 34a are partially or completely blocked. Such a condition may exist if the user relaxes his or her hand, thereby allowing the speaker 20 to rest on his or her cheek. Such a condition may also exist if the user has a large hand, thereby causing the speaker 20 to rest uncomfortably in his palm.

Advantageously, the device 2 does not have to be removed from the user's wrist to be used and the user's shirt or coat cuff does not interfere with rotation of layer 12. FIGs. 3 and 4 show the telephone device 2 before the hand and speaker 20 are brought to cover the user's ear. When the first end 13 of the top layer 12 is placed in the cradle 16, shown in FIG. 11, the device 2 is in closed position and is "on hook". In the closed position the device can be used as a watch, alarm, pager or bracelet. In this mode the speaker 20 can be used to provide a telephone ringing signal, time of day alarm, or the device can be programmed to receive and send paging signals.

In an alternate design of the radiotelephone device 2 in which the present invention may be included, the case 4 is placed in a nonstandard position along the forward side of the user's wrist, rather than the flat portion of the user's wrist, as shown in FIG. 4. To increase the comfort of this nonstandard position of the case 4, the bottom of the case 4 has the shape of a saddle, which fits around the forward side of the

user's wrist. Additionally, this nonstandard position of the case 4 places the display 7 in a position which is easier for the user to see and keeps the face of the case from scratching.

The strap 10 is made of materials that are relatively stiff so that when the top layer 12 of the strap 10 is released and rotated, the top layer 12 will remain in an "upright" position. At the same time, the top layer 12 must be flexible and deformable enough to be attached around a wrist. Stiffness may be accomplished by using a spring material for the conductors which are inside the strap or by including a layer of stiff plastic.

In preferred embodiments, each layer 12 and 14 of the strap 10 contains at least one antenna conductor as illustrated in FIG. 7. A first antenna, comprising first and second conductors 70 and 71 respectively, is embedded in the bottom layer 14 of strap 10. A second antenna, comprising a third conductor 72, is embedded in the top layer 12 of the strap 10. When the top layer is rotated away from the bottom layer, the first antenna and second antenna can be made substantially perpendicular to one another and hence substantially uncoupled and independent of one another.

If the antennas are driven with orthogonally independent signals, such a perpendicular arrangement of the antennas provides polarization diversity. The combination of the perpendicular orientation of the antennas and the orthogonal signals used to drive the antennas renders the arrangement essentially insensitive to orientation, thus improving transmission and reception. As a result, the position of the radiotelephone will not greatly impact signal transmission or reception. Such independent signals may comprise time separated signals, frequency separated signals or signals of the same frequency but quadrature in phase. For example, if one antenna loses reception of the signals, the other antenna may retain reception of the signals so that the user has uninterrupted communication ability.

In an alternative embodiment, one antenna may be used for transmitting and the other, because it is essentially uncoupled from the first one, may be used for receiving.

In FIG. 8, centertapped inductor 82, connected between antenna conductors 70 and 71, behaves like a high impedance circuit to differential mode excitation and like a short circuit to common mode excitation. In common mode excitation, inductor 82 bridges antenna conductors 70 and 71, so that they serve as a continuous ground plane onto which antenna conductor 72 may be imaged. The first antenna, comprising dipole-arranged conductors 70 and 71, is driven differentially at terminal pair 80. The second antenna, comprising antenna conductor 72 and the ground plane formed by the inductor 82 bridging antenna conductors 70 and 71, is driven at terminal pair 81, located

ed between conductor 72 and the centertap of inductor 82.

In FIGs. 7 and 9, dashed line 73 indicates an interconnecting bundle of plural conductors, embedded in strap 10, for the purpose of delivering power to and signals between circuit blocks 91, 92 and 93, which are located in case 4, hinge 18 and first end 13 of top layer 12 respectively. Antenna circuitry 92 may comprise either passive signal splitting and conditioning networks or direct drive, active radio frequency (RF) generating circuits for driving the antenna conductors 70, 71 and 72. Multi-filar inductors 95, 96 and 97, also embedded in strap 10, provide RF isolation of the segments of conductor bundle 73 that run in close proximity to and couple strongly to antenna conductors 70, 71 and 72. Alternatively, the isolated segments of conductor bundle 73 may be used in lieu of conductors 71 and 72.

In an alternative embodiment, FIG. 10 shows schematically an antenna conductor comprising a loop of transmission line 100, embedded in lower layer 14 of band 10, (not shown) and terminated at both ends onto centertapped, bi-filar wound inductor 103 inside case 4, represented here by a rectangle 4. The outer conductor of transmission line 100 functions as a first, loop antenna. Access to the outer conductor of the transmission line 100 is gained by driving into terminal pair 104 at the ends of transmission line 100.

Antenna conductor 72, embedded in upper layer 12 of strap 10, is connected to a tap in the inner conductor 101 of transmission line 100, part way around strap 10 at pivotable hinge 18 indicated here by a rectangle 18. Antenna conductor 72 is essentially perpendicular to the plane of the loop antenna formed by transmission line 100 when the top layer 12 of the strap is rotated away from the bottom layer. As in the arrangement of FIG. 8, the outer conductor of transmission line 100 serves as a ground plane onto which antenna conductor 72 may be imaged. The second antenna comprising conductor 72 is accessed by driving terminal pair 105 at the centertaps of bi-filar wound inductor 103. Inductor 103 functions in essentially the same way as inductor 82 in the arrangement of FIG. 8. In this way, the first, loop antenna is driven in common mode, leaving it essentially unexcited and thus substantially independent of the second antenna.

Although the present invention has been described in connection with radio frequency, it is to be understood that the radio telephone device is equally useful with infrared and other transmission facilities. Applications and modifications which may be devised by those skilled in the art are included within the scope and spirit of this invention.

Claims

1. A radiotelephone device comprising:
 - a case having a transceiver;
 - a strap attached to the case for fastening the instrument to a user's wrist, the strap comprising an additional strap member,
 - a mechanism for rotatably attaching the member to the strap such that a least a portion of the member can rotate with respect to the strap;
 - a microphone electrically connected to said transceiver;
 - a speaker located on the member and electrically connected to said transceiver,
 - a first antenna located in the strap, and
 - a second antenna located in the member and electrically separate from said first antenna, rotation of the member relative to the strap causing the first antenna and the second antenna to be at an angle for example 90° with respect to one another.
2. The device according to claim 1, wherein said strap and/or the member are comprised of a flexible insulating material; or the first and second antenna are electrically isolated by means of the said mechanism.
3. The device according to claim 1 or 2, further comprising driving means for driving the first antenna and the second antenna with orthogonally independent signals, such signals being for example time separated signals; or frequency separated signals, or quadrature in phase.
4. The device according to claim 1 2 or 3, wherein said first antenna is a dipole antenna for example a loop antenna, and/or said second antenna is a stub antenna.
5. The device according to claim 4 wherein said first antenna acts as a ground plane for said stub antenna.
6. The device according to claim 1, wherein said first antenna and/or the second antenna comprises a receiving antenna and transmitting antenna.
7. The device according to claim 1, wherein said strap includes means for adjusting the diameter of the strap so as to fit on a user's wrist, said adjusting means optionally comprising an inseparable piece permanently connected to said case at one end.
8. The device according to claim 1, wherein said first and/or second antenna are comprised of isolated segments of embedded multi-conductor interconnecting cable.
9. The device according to claim 1, further comprising an active antenna drive which is embedded in said mechanism, and/or the antenna are included at an angle between 90 and 180 degrees.
10. The device according to claim 4, wherein said first antenna acts as a ground plane for the second antenna when the device is driven in common excitation mode, and/or said first antenna is directly excitable when the device is driven in differential excitation mode.
11. The device according to claim 10 further comprising a center-tapped inductor electrically connected to said first antenna.
12. The system according to claim 1 further comprising at least one multifilar wound inductor embedded in the strap, said at least one inductor isolating segments of conductors running parallel to the first antenna in the strap and the second antenna in the said member.
13. The device according to claim 1 wherein said first antenna is a receiving antenna and said second antenna is a transmitting antenna, or said first antenna is a transmitting antenna and said second antenna is a receiving antenna.
14. An antenna system comprising:
 - a dipole antenna;
 - a stub antenna electrically isolated from the dipole antenna; and
 - an inductor electrically connected to the dipole antenna.
15. The system according to claim 14 wherein said dipole antenna is a loop antenna, or is directly excitable when the system is driven in differential excitation mode, or acts as a ground plane to the stub antenna when the system is driven in common excitation mode.

FIG. 1

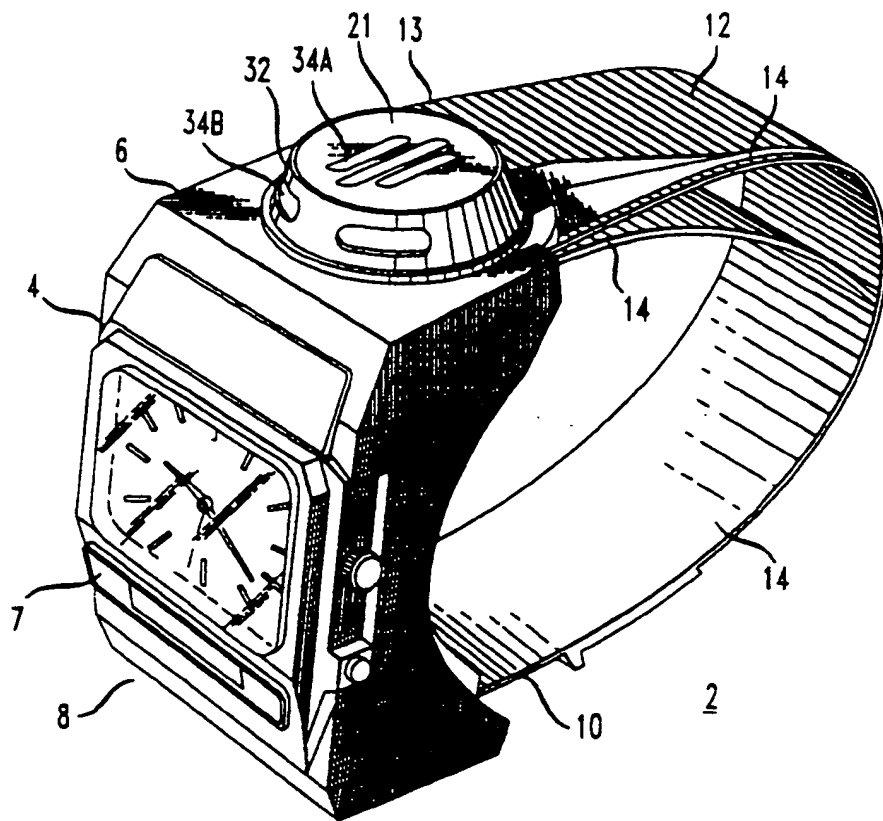


FIG. 2

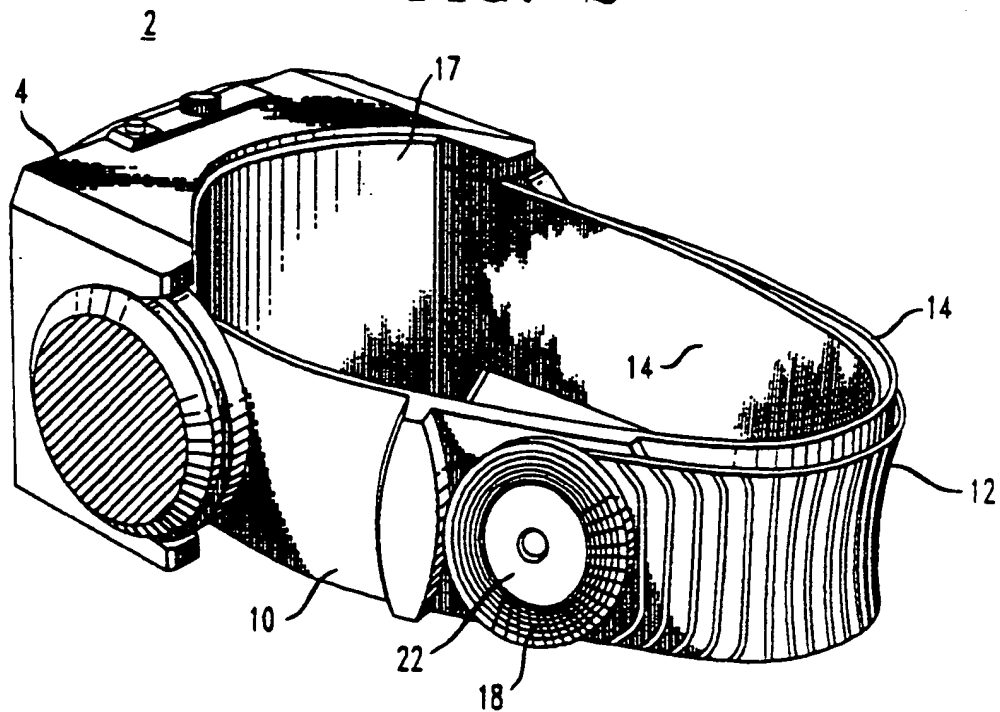


FIG. 3

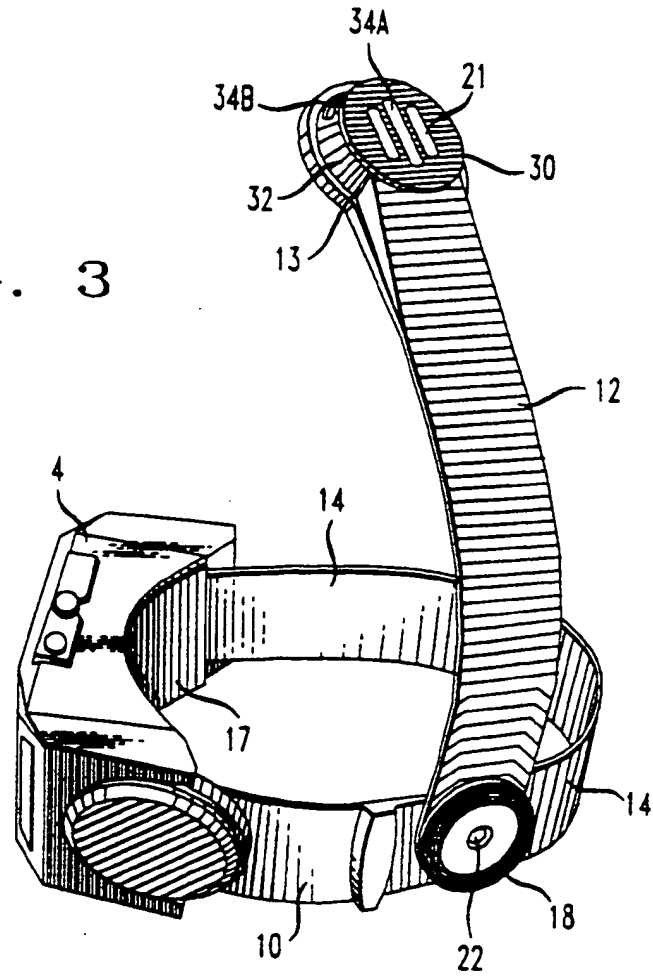


FIG. 4

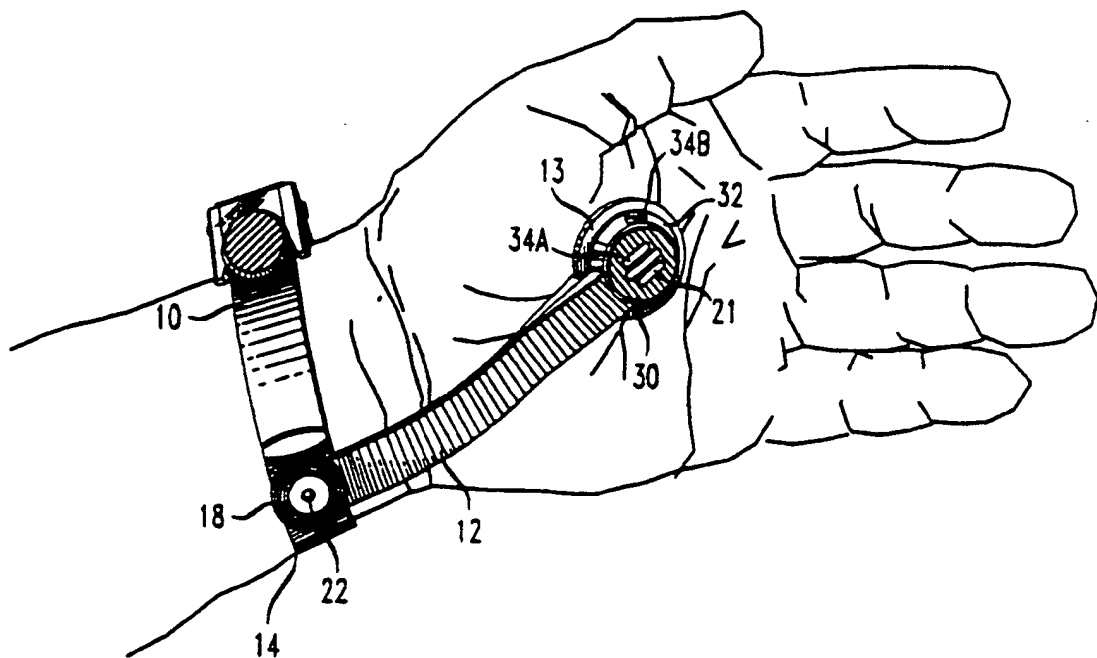


FIG. 5

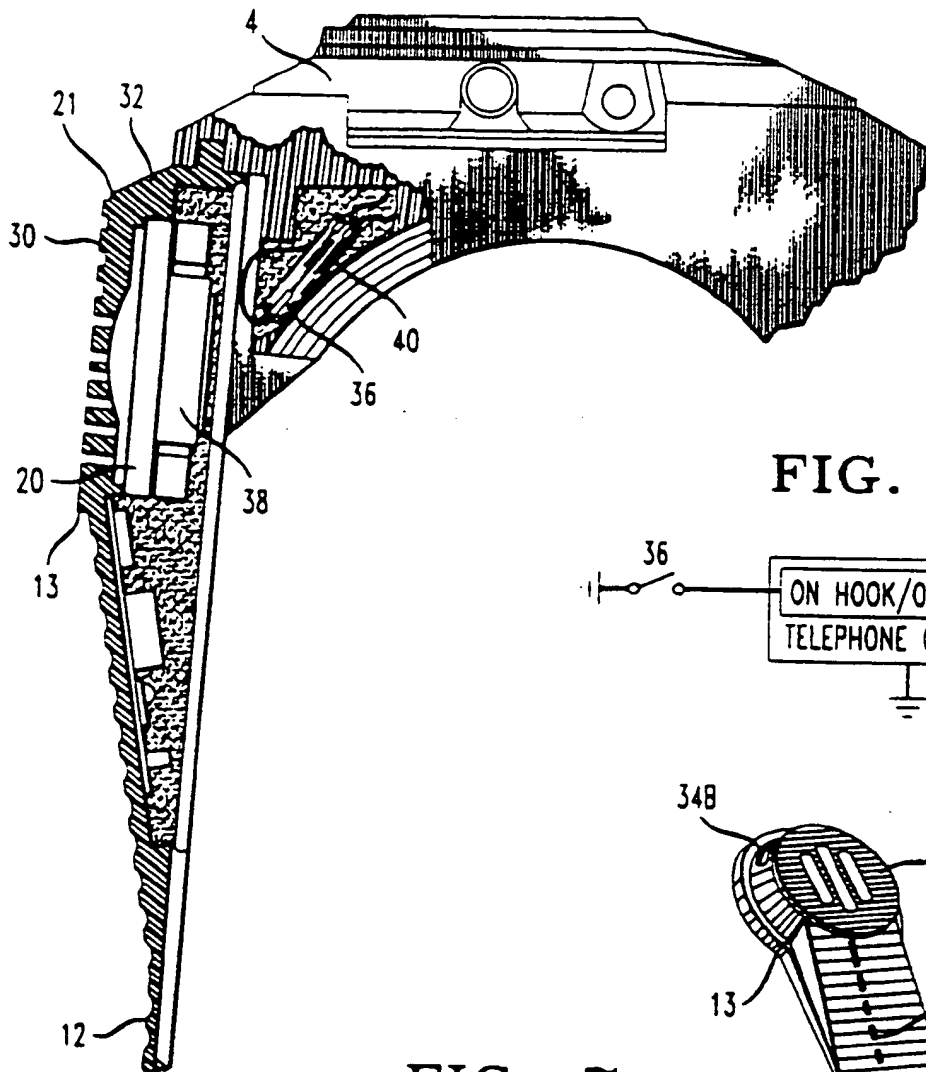


FIG. 6

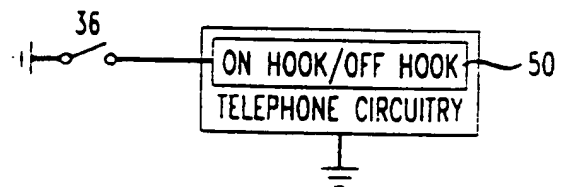


FIG. 7

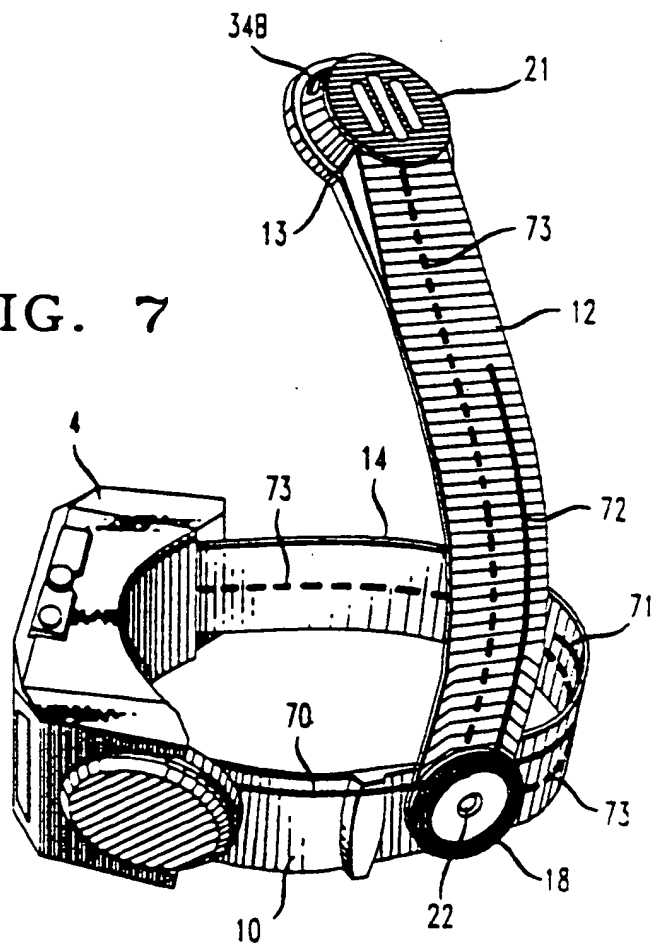


FIG. 8

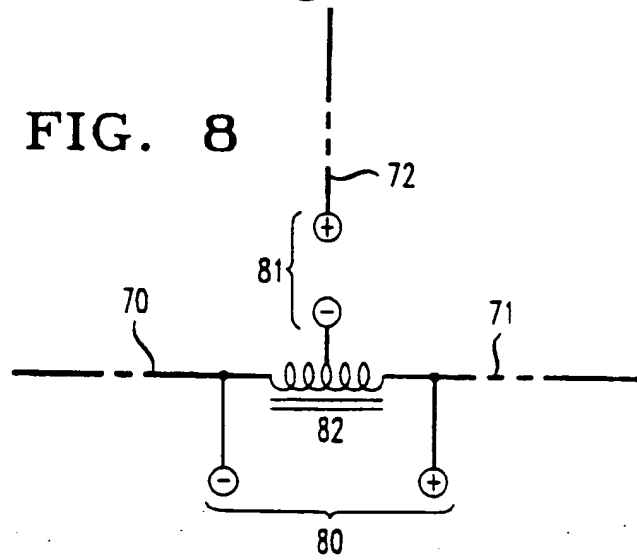


FIG. 9

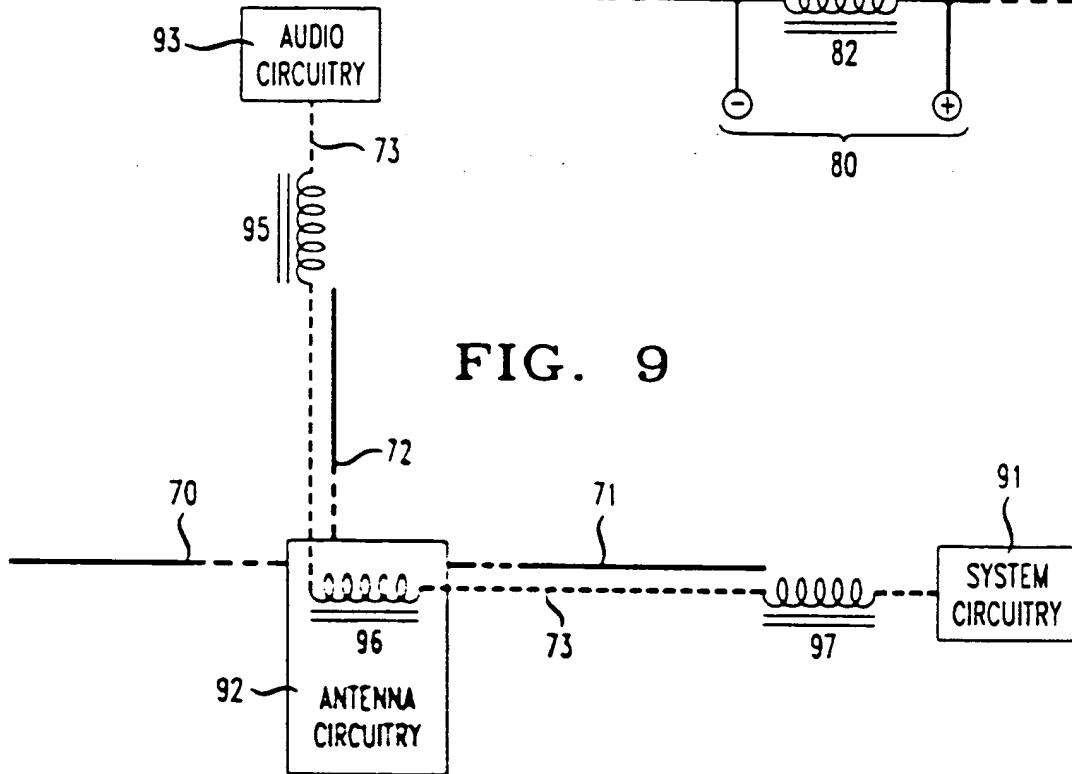


FIG. 10



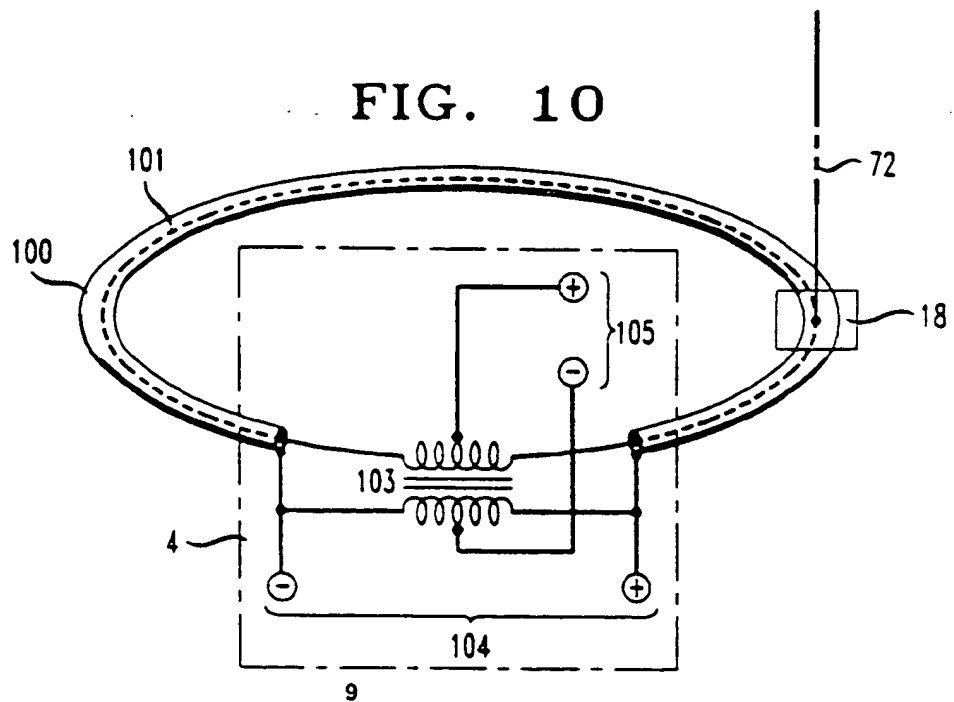


FIG. 11



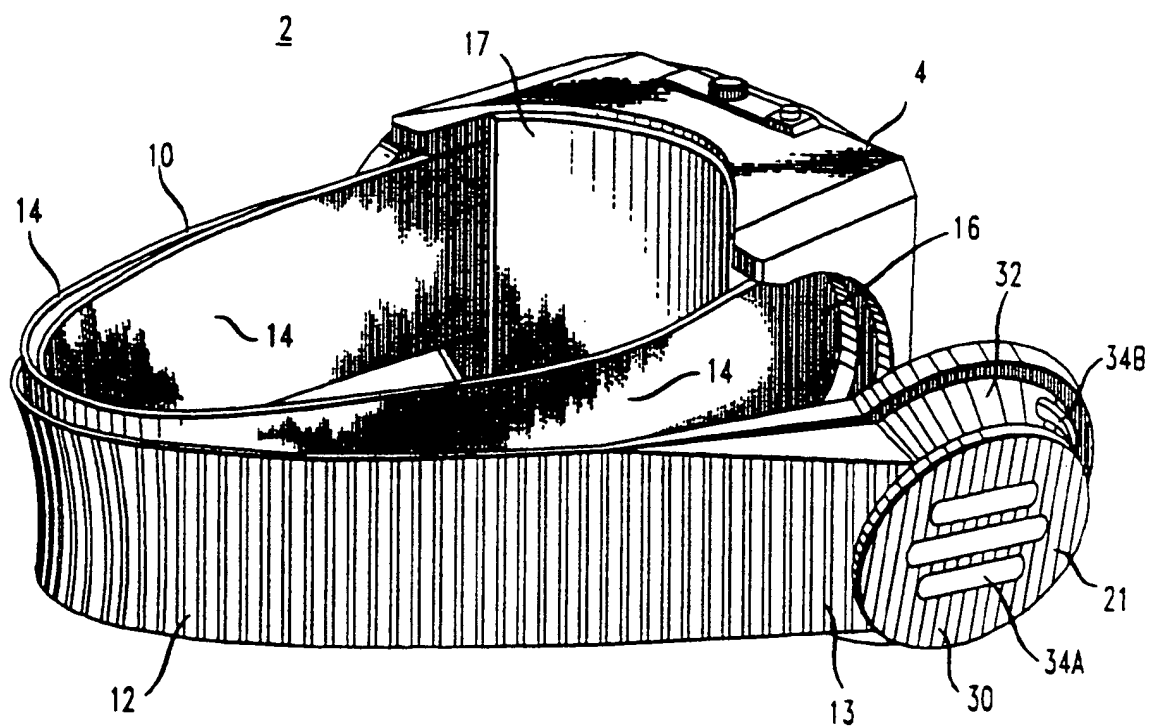

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 684 704 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
10.11.1999 Bulletin 1999/45

(51) Int Cl.⁶: **H04B 1/38**, **H04B 7/02**,
H01Q 21/24

(43) Date of publication A2:
29.11.1995 Bulletin 1995/48

(21) Application number: **95302820.6**

(22) Date of filing: **26.04.1995**

(84) Designated Contracting States:
CH DE FR IT LI

(30) Priority: **06.05.1994 US 239110**

(71) Applicant: **AT&T Corp.**
New York, NY 10013-2412 (US)

(72) Inventors:
• **Blonder, Greg E.**
Summit, New Jersey 07901 (US)

- **Knoedl, Goerge, Jr.**
Milford, New Jersey 08848 (US)
- **Johnson, Bertrand Harold**
Murray Hill, New Jersey 07974 (US)
- **Saleh, Adel Abdel Moneim**
Holmdel, New Jersey 07733 (US)

(74) Representative: **Johnston, Kenneth Graham**
Lucent Technologies (UK) Ltd,
5 Mornington Road
Woodford Green Essex, IG8 OTU (GB)

(54) A diversity antenna for a wrist telephone

(57) A radiotelephone wrist device includes a case having a transceiver and a strap attached to the case for fastening the device to a user's wrist. The strap has a top layer and a bottom layer. The top layer is attached to the bottom layer by a pivot mechanism which facilitates rotating at least a portion of the top layer with re-

spect to the bottom layer. A microphone is located on the strap and electrically connected to the transceiver. A speaker is located at an end of the top layer of the strap and electrically connected to the transceiver. A first antenna is located in the bottom layer of the strap. A second antenna is located in the rotatable portion of the top layer of the strap.

EP 0 684 704 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 95 30 2820

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	US 5 007 105 A (KUDOH KAZUHIRO ET AL) 9 April 1991 (1991-04-09) * abstract: claims 1,7,23 *	1	H04B1/38 H04B7/02 H01Q21/24
A	US 5 280 296 A (TAN WEI L ET AL) 18 January 1994 (1994-01-18) * abstract: claims 1,15; figures 3,4 *	1	
A,D	US 5 239 521 A (BLUNDER GREG E) 24 August 1993 (1993-08-24) * the whole document *	1	
X	US 3 882 506 A (MARTIN ET AL) 6 May 1975 (1975-05-06) * the whole document *	14,15	
X	PATENT ABSTRACTS OF JAPAN vol. 005, no. 051 (1981-04-01) 10 April 1981 (1981-04-10) & JP 56 002707 A (1981-01-13) 13 January 1981 (1981-01-13) * abstract *	14,15	
X	PATENT ABSTRACTS OF JAPAN vol. 010, no. 051 (1986-03-07) 7 March 1986 (1986-03-07) & JP 60 210011 A (1985-10-10) 01), 22 October 1985 (1985-10-22) * abstract *	14,15	TECHNICAL FIELDS SEARCHED (Int.Cl.6) H04Q H04B H01Q
A	EP 0 458 592 A (ALLIANT TELECOMM CORP) 27 November 1991 (1991-11-27)	14,15	
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
MUNICH		1 September 1999	Kolbe, W
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date C: document cited in the application D: document cited for other reasons S: member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 02 (P44C01)



European Patent
Office

Application Number

EP 95 30 2820

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

LACK OF UNITY OF INVENTION
SHEET B

Application Number
EP 95 30 2820

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims: 1-13

Radiotelephone having a first antenna located in a strap and
a second antenna located in a rotatably attached strap member

2. Claims: 14, 15

Antenna system comprising a dipole antenna, a stub antenna
and an inductor

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 95 30 2820

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

01-09-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5007105 A	09-04-1991	JP 1046325 A	20-02-1989
		JP 1050626 A	27-02-1989
		JP 1938632 C	09-06-1995
		JP 6066700 B	24-08-1994
		JP 1073916 A	20-03-1989
		JP 1073918 A	20-03-1989
		JP 1910757 C	09-03-1995
		JP 6038580 B	18-05-1994
US 5280296 A	18-01-1994	NONE	
US 5239521 A	24-08-1993	DE 69321033 D	22-10-1998
		DE 69321033 T	04-03-1999
		EP 0572252 A	01-12-1993
		JP 6113000 A	22-04-1994
US 3882506 A	06-05-1975	NONE	
JP 56002707 A	13-01-1981	NONE	
JP 60210011 A	22-10-1985	NONE	
EP 0458592 A	27-11-1991	AT 133814 T	15-02-1996
		DE 69116733 D	14-03-1996
		DE 69116733 T	05-06-1996
		IE 72170 B	26-03-1997
		JP 4026233 A	29-01-1992
		US 5181043 A	19-01-1993

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.